


A paper cone with a unique Nextel coating ensures smooth frequency response and low distortion.

A large magnet system with a bumped back plate, together with a very long and light weight CCAW voice coil, allow extreme coil excursion with low distortion and excellent transient response.


Heavy copper rings mounted above and below the T-shaped pole piece reduce non linear and modulation distortion and increase overload margin.

A chrome plated brass phase plug reduces compression due to temperature variations in the voice coil, increase long term power handling capacity and eliminates resonances in the cavity inside the voice coil former.

The extremely stiff and stable injection moulded metal basket keeps the critical components in perfect alignment. Large windows in the basket both above and below the spider reduce sound reflection, air flow noise and cavity resonance to a minimum.

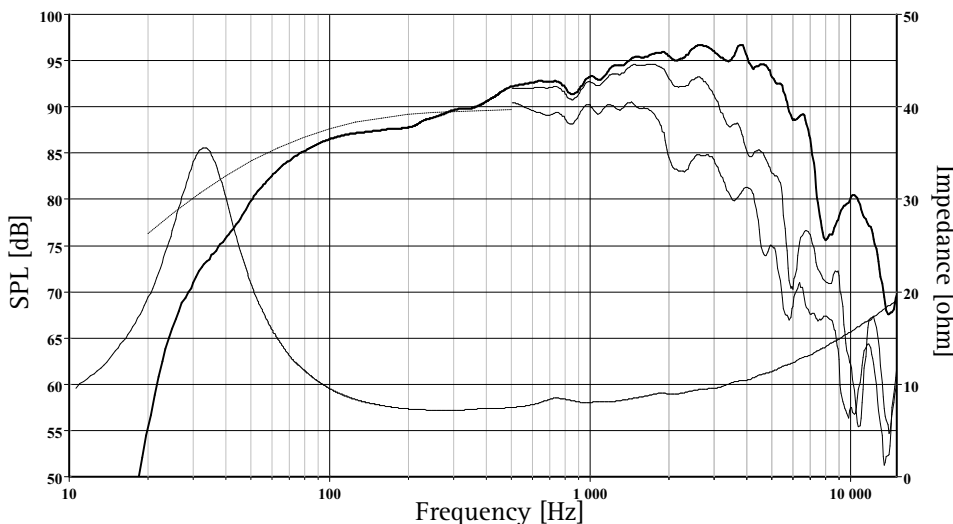

The frequency responses above show measured free field sound pressure in 0, 30, and 60 degrees angle using a 21L closed box. Input 2.83 V_{RMS}, microphone distance 0.5m, normalized to SPL 1m. The dotted line is a calculated response in infinite baffle based on the parameters given for this specific driver. The impedance is measured in free air without baffle using a 2V sine signal.

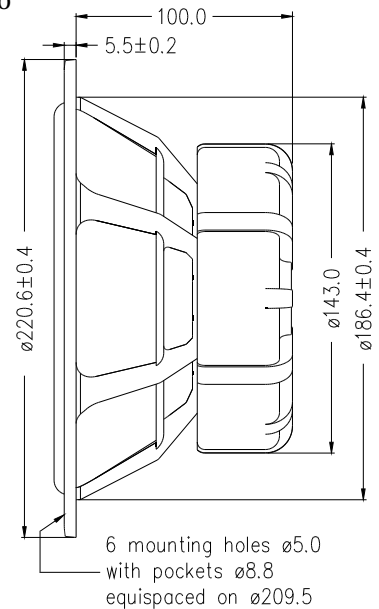

Nominal Impedance	8 Ohms	Voice Coil Resistance	6.1 Ohms
Recommended Frequency Range	30 - 3000 Hz	Voice Coil Inductance	0.61 mH
Short Term Power Handling *	250 W	Force Factor	8.8 N/A
Long Term Power Handling *	90 W	Free Air Resonance	33 Hz
Characteristic Sensitivity (2,83V, 1m)	90.0 dB	Moving Mass	20.0 g
Voice Coil Diameter	39 mm	Air Load Mass In IEC Baffle	1.9 g
Voice Coil Height	20 mm	Suspension Compliance	1.2 mm/N
Air Gap Height	6 mm	Suspension Mechanical Resistance	2.6 Ns/m
Linear Coil Travel (p-p)	14 mm	Effective Piston Area	220 cm ²
Maximum Coil Travel (p-p)	21 mm	VAS	72 Litres
Magnetic Gap Flux Density	1.3 T	QMS	1.73
Magnet Weight	1.30 kg	QES	0.36
Total Weight	3.60 kg	QTS	0.30